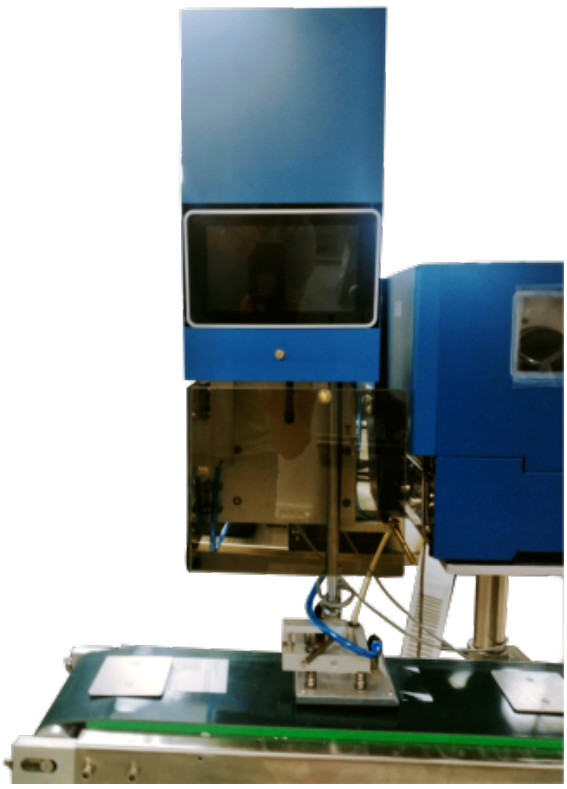


APIX 4950P

Print and Apply System for Self-Adhesive Labels with APIX 250S Printer

The APIX 4950P system is designed for printing and applying self-adhesive labels. It comes equipped with the APIX 250S printer and a variable-stroke pneumatic applicator, ensuring precise, real-time application. The system features right-hand label loading with left-hand output for printed labels.

COD: PSG-GR.ST.027
PLURISERVICE CODE PSG-GR.ST.027

Retail | Trasporti e logistica | Produzione | Sanità

DESCRIPTION

The APIX 4950P system represents the pinnacle of excellence in self-adhesive label printing and application. Equipped with the APIX 250S printer and a variable-stroke pneumatic applicator, it guarantees precise, real-time application. Designed for maximum efficiency, it offers a reliable, high-quality solution for all labeling requirements.

BASE MACHINE COMPONENTS

- Anodized aluminum base plate for printer support
- Die-cast aluminum bracket for support column mounting

SPECIFICATIONS: APIX PSG-APIX 4950P

- Weight (APIX 4950): Approx. 10 kg
- Power Supply: 220V – 50Hz
- Design/Footprint:
  - Width: 900 mm
  - Height: 500 mm
  - Depth: 400 mm

TECHNICAL SPECIFICATIONS

Print Method: Thermal Transfer or Direct Thermal
Printer Unit: APIX 250S with internal rewinder
Print Resolution: 8 dots/mm (203 dpi)
Max. Print Speed: 356 mm/sec
Application Speed: Up to 10 m/min
Print Area Width: 114 mm – Length: 500 mm
Label Width (Min – Max): From 25.4 mm to 118 mm
Max. Label SizeWidth: 118 mm – Length: 250 mm